

SAN TEST MODULE

FTB-8520 Packet Blazer

■■■ NETWORK TESTING–TRANSPORT AND DATACOM



Platform Compatibility

FTB-400 Universal Test System

- Fully integrated functionality for installing, commissioning and maintaining Fibre Channel networks
- FC-0, FC-1 and FC-2 logical layer configuration for Fibre Channel port definition, testing and performance analysis
- Round-trip latency measurement and buffer-to-buffer credit estimation
- Dual test ports with 1 Gb/s (100 MB/s) and 2 Gb/s (200 MB/s) full-line-rate Fibre Channel traffic generation and BER testing

||| The Next Step in Fibre Channel Network Testing


Housed in the FTB-400 Universal Test System, EXFO's FTB-8520 Packet Blazer SAN Test Module brings FC-0, FC-1 and FC-2 logical layer Fibre Channel testing to services delivered via transport protocols, such as DWDM, SONET/SDH and dark fiber. It provides valuable timing information and buffer credit estimation for Fibre Channel network deployment.

KEY FEATURES

- Simultaneous traffic generation and analysis at 100 % wire speed for 1 Gb/s and 2 Gb/s rates on dual test ports
- Easy-to-use Smart User Interface (SUI) for configurable screens, customization of test routines, as well as real-time and historical performance reporting
- Fully integrated FC-0, FC-1 and FC-2 logical layer testing, enabling fabric and port login
- Round-trip latency measurements for assessing the capability of a link
- Buffer-to-buffer credit estimation for optimal configuration of Fibre Channel nodes
- BER testing of Fibre Channel circuits



The FTB-8520 Packet Blazer SAN Test Module is housed in the FTB-400 Universal Test System, EXFO's tough, all-in-one portable platform.

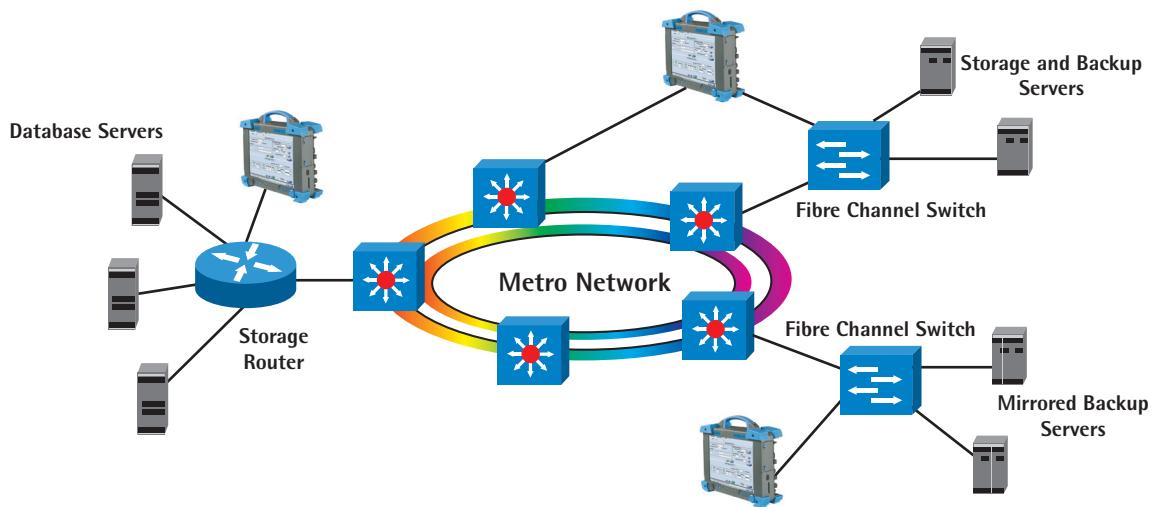


Thanks to end-to-end network testing capabilities, EXFO's FTB-8520 enables fast deployment and configuration of Fibre Channel networks. Communication between the transport network, interconnection devices and end nodes can be validated with features such as BER testing, latency measurement, buffer-to-buffer credit estimation and port login capabilities.

Efficient Testing Leads to Reliable Performance

EXFO's FTB-8520 Packet Blazer SAN Test Module enables the testing of both telecom and Fibre Channel services, and it lets you conduct end-to-end latency testing. What's more, the FTB-8520 helps you ensure long-term integrity and error-free data delivery across Fibre Channel links.

USER-FRIENDLY INTERFACE

The FTB-8520 Packet Blazer SAN's easy-to-use Smart User Interface (SUI) lets you tailor screen configurations, customize test routines and format reports on real-time and historical performance.

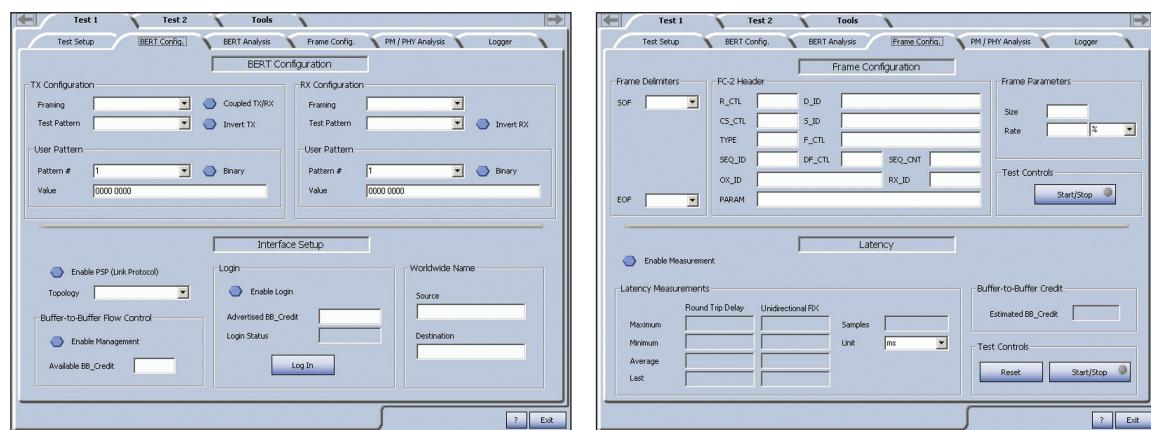

FIRST-CLASS COMPREHENSIVENESS

The FTB-8520 performs Fibre Channel testing at wire-speed, full-duplex 100 MB/s and 200 MB/s, and it simultaneously delivers traffic generation at 100 % wire speed. This versatile module also features bit-error-rate testing (BERT) for Fibre Channel networks.

BUFFER-TO-BUFFER CREDIT ESTIMATION

Estimating buffer credit values is a crucial part of Fibre Channel network deployment. The FTB-8520 performs this task with high accuracy, taking into account network distance, latency and peak-traffic analysis.

SPECIFICATIONS

	FTB-8520-1	FTB-8520-2
Port	One Fibre Channel port	Two Fibre Channel ports
Rate (MB/s)	100 and 200 (software option)	100 and 200 (software option)
Connector type	LC	LC
Optical transceivers	850 nm short-wave optics 1310 nm long-wave optics 1550 nm long-wave optics	850 nm short-wave optics 1310 nm long-wave optics 1550 nm long-wave optics
Port capacity	Full-line-rate traffic generation and analysis	Full-line-rate traffic generation and analysis

GENERAL SPECIFICATIONS

Weight (without transceiver)	0.5 kg	(1.1 lb)
Size (H x W x D)	25 mm x 96 mm x 260 mm	(1 in x 3 3/4 in x 10 1/4 in)
Temperature		
operating	0 °C to 40 °C	(32 °F to 104 °F)
storage	-40 °C to 60 °C	(-40 °F to 140 °F)

ORDERING INFORMATION

FTB-85XX-XX

MODULE

Model

FTB-8520-1: Packet Blazer SAN, 1 port
FTB-8520-2: Packet Blazer SAN, 2 ports

Software option

00: 100 MB/s standard software
200: 200 MB/s optional software

TK-400-8500-XX-XX-XX-FTB-85XX-XX-XX-XX-XX

TEST KIT

Screen

D4: TFT active screen

Memory

N10: 256 MB
N12: 512 MB

Expansion unit

00: 2-slot module receptacle
AV: 4-slot module receptacle
H: 7-slot module receptacle

Model

FTB-8520-1 = Packet Blazer SAN, 1 port
FTB-8520-2 = Packet Blazer SAN, 2 ports

Software option

00: 100 MB/s standard software
200: 200 MB/s optional software

850 nm transceiver options

FTB-8593-1 = 1 transceiver module
FTB-8593-2 = 2 transceiver modules

1310 nm transceiver options

FTB-8594-1 = 1 transceiver module
FTB-8594-2 = 2 transceiver modules

1550 nm transceiver options

FTB-8595-1 = 1 transceiver module
FTB-8595-2 = 2 transceiver modules

TRANSCEIVER

FTB-859X

FTB-8593: 2.125/1.0625 Gb/s Fibre Channel, 1.25 Gigabit Ethernet, 850 nm (200-M5/M6-SN-I/100-M5/M6-SN-I/1000 Base-SX); optical SFP transceiver module with LC connectors.

FTB-8594: 2.125/1.0625 Gb/s Fibre Channel, 1.25 Gigabit Ethernet, 1310 nm (200-SM-LC-L/100-SM-LC-L/1000 Base-LX); optical SFP transceiver module with LC connectors.

FTB-8595: 2.125/1.0625 Gb/s Fibre Channel, 1.25 Gigabit Ethernet, 1550 nm (200-SM-LL-L/100-SM-LL-L/1000 Base-ZX); optical SFP transceiver module with LC connectors.

SOFTWARE OPTION


FTB-852X

FTB-8521: 200 MB/s software option

UPGRADE KIT

FTB-858X

FTB-8582: 2-port upgrade kit for FTB-8520 Packet Blazer SAN

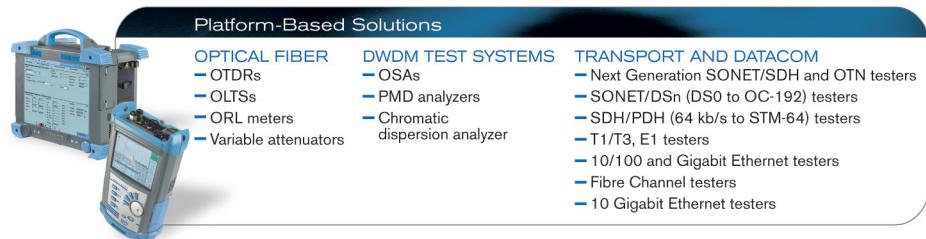

Find out more about EXFO's extensive line of high-performance portable instruments by visiting our website at www.EXFO.com.

EXFO Corporate Headquarters > 400 Godin Avenue, Quebec City (Quebec) G1M 2K2 CANADA | Tel.: 1 418 683-0211 | Fax: 1 418 683-2170 | info@EXFO.com

Toll-free: 1 800 663-3936 (USA and Canada) | www.EXFO.com

EXFO Montreal	2650 Marie-Curie	St-Laurent (Quebec) H4S 2C3 CANADA	Tel.: 1 514 856-2222	Fax: 1 514 856-2232
EXFO Toronto	160 Drumlin Circle	Concord (Ontario) L4K 3E5 CANADA	Tel.: 1 905 738-3741	Fax: 1 905 738-3712
EXFO America	3701 Plaza Parkway, Suite 160	Plano, TX 75075 USA	Tel.: 1 800 663-3936	Fax: 1 972 836-0164
EXFO Europe	SOUTHAMPTON > Omega Enterprise Park, Electron Way	Chandlers Ford, Hampshire SO53 4SE ENGLAND	Tel.: +44 2380 246810	Fax: +44 2380 246801
EXFO Asia	151 Chin Swee Road, #03-29 Manhattan House	SINGAPORE 169876	Tel.: +65 6333 8241	Fax: +65 6333 8242
EXFO China	No.88 Fuhua, First Road Central Tower, Room 801, Futian District Beijing New Century Hotel Office Tower, Room 1754-1755 No. 6 Southern Capital Gym Road	Shenzhen 518048, CHINA Beijing 100044 P.R. CHINA	Tel.: +86 (755) 8203 2300 Tel.: +86 (10) 6849 2738	Fax: +86 (755) 8203 2306 Fax: +86 (10) 6849 2662

EXFO is certified ISO 9001 and attests to the quality of these products. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. All of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor. For the most recent version of this spec sheet, please go to the EXFO website at <http://www.EXFO.com/specs>

In case of discrepancy, the Web version takes precedence over any printed literature.