

CD-4000 Clock Data Recovery

OPTICAL/ELECTRICAL CDR BOX FOR 28/56 GBd

- Efficient CDR solution for production lines.



KEY FEATURES

Supports NRZ and PAM4 signals

Integrated O/E with optical splitter (optional)

Supports singlemode or multimode


Ultra low random jitter

Auto-locking

Can test 400G transceivers


TEST CONFIGURATIONS OF 53G TRANSCEIVER

1 400GBASE-DR4 400GBASE-FR4

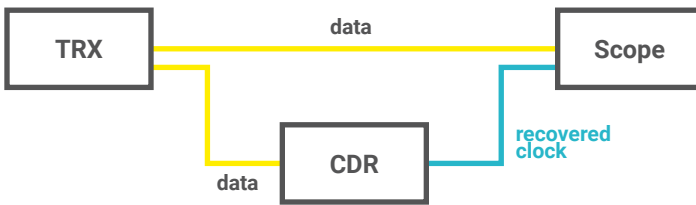

Test pattern: PRBS7Q to PRBS16Q and SSPRQ.

2 100GBASE-DR1 100GBASE-FR1

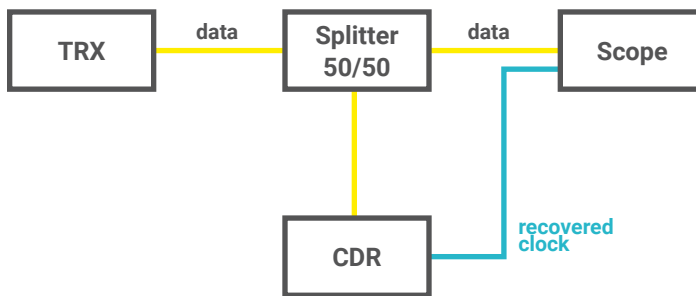

Test pattern: PRBS7Q to PRBS16Q.

Test pattern: limited support for SSPRQ.

SPECIFICATIONS

All specifications are typical at 23 °C ± 2 °C unless otherwise specified.

OPTICAL SPECIFICATIONS

	Optical singlemode CDR	Optical multimode CDR
Modulation	NRZ and PAM4	NRZ and PAM4
Symbol rate (GBd)	25, 25.78125, 26.5625, 28.05, 28.125, 28.9, 53.125, 57.8	25, 25.78125, 26.5625, 28.05, 28.125, 28.9, 53.125, 57.8
Wavelength (nm)	1250 - 1650 1260 - 1650 (with built-in splitter)	850 - 1350
Return loss (dB)	-30 (at 1310/1550 nm)	-30 (at 850 nm)
Input sensitivity (dBm)	-5 (at 1310/1550 nm)	-5 (at 850 nm)
Damage power (mW)	5	5
Connector type	FC/PC (9/125 μm)	FC/PC (50/125 μm)
Loop bandwidth (MHz)	20	20
Clock output ratio	/8 for 53.125 GBd to 57.8 GBd /4 for 25 GBd to 28.9 GBd	/8 for 53.125 GBd to 57.8 GBd /4 for 25 GBd to 28.9 GBd
Recovered clock random jitter (fs)	< 290 (0 dBm, PRBS16Q at 53 GBd)	< 290 (0 dBm, PRBS16Q at 53 GBd)
Clock output amplitude (mV)	400	400

ELECTRICAL SPECIFICATIONS

Modulation	NRZ and PAM4
Symbol rate (GBd)	25, 25.78125, 26.5625, 28.05, 28.125, 28.9, 53.125, 57.8
Bandwidth (GHz)	25.6 - 31.9
Return loss (dB)	-30
Input amplitude (mV _{ppd})	350 - 550
Connector type	2.92 mm (K)
Loop bandwidth (MHz)	20
Clock output ratio	/8 for 53.125 GBd to 57.8 GBd /4 for 25 GBd to 28.9 GBd
Recovered clock random jitter (fs)	<50

OPTICAL SPECIFICATIONS – 10G CDR

Modulation	NRZ
Symbol rate (GBd)	1.0 - 11.3
Wavelength (nm)	1260 - 1610
Input sensitivity (dBm)	-12
Damage power (dBm)	5
Connector type	FC/PC (9/125 μm)
Clock output ratio	/8
Clock output amplitude (mV)	540

GENERAL SPECIFICATIONS

Size (H x W x D)	103 mm x 442 mm x 300 mm (4.1 in x 17.4 in x 11.8 in)
Weight	≤10 kg (22 lb)
Temperature	Operating Storage
	5 °C to 40 °C (41 °F to 104 °F) -20 °C to 70 °C (-4 °F to 158 °F)
Relative humidity	20% to 80%
Power ^a	100/120 Vac (50/60/400 Hz) 220/240 Vac (50/60 Hz) 60 W typical/80 W max.
Access interface	Gigabit Ethernet (RJ45 port)

GENERAL SPECIFICATIONS – 10G CDR

Size (H x W x D)	51 mm x 125 mm x 172 mm (2.0 in x 4.9 in x 6.8 in)
Weight	≤ 1 kg (2.2 lb)
Temperature	Operating Storage
	5 °C to 40 °C (41 °F to 104 °F) -20 °C to 70 °C (-4 °F to 158 °F)
Relative humidity	20% to 80%
Power	100 V to 240 V, 50/60 Hz
Access interface	n/a

a. Operate with supply voltage fluctuations up to ±10 % of the nominal voltage.

ORDERING INFORMATION

CD-4000-XX-XX

Model

56-O = 28 GBd/56 GBd optical CDR box
 56-E = 28 GBd/56 GBd electrical CDR box
 56-MM = 28 GBd/56 GBd optical multimode CDR box
 10-O = 10GBd optical CDR with built-in 80/20 splitter^a

Options

50S = Built-in 50/50 splitter (only for 56-O)
 80S = Built-in 80/20 splitter (only for 56-O)

a. No need to add splitter option for the optical 10G CDR.

EXFO headquarters T +1 418 683-0211 **Toll-free** +1 800 663-3936 (USA and Canada)

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to www.EXFO.com/contact.

For the most recent patent marking information, please visit www.EXFO.com/patent. EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. **Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.**

For the most recent version of this spec sheet, please go to www.EXFO.com/specs.

In case of discrepancy, the web version takes precedence over any printed literature.